



FLOORLEUM MARBLE NW

category: low-maintenance vinyl sheet

FLOORLEUM advanced to NW finish. Simple and soft imaged vinyl sheet with a marble pattern.

Specification	overall thickness	2.0mm/2.5mm	width×length	1820mm×9m
	others	Antibacterial Finished / Highly Durable UV-Coated Surface		
JIS Registered No.	No. GB0506143 GB0610001 (JIS A 5705 Vinyl Sheet Flooring)			
Packing	9m/roll			
Net Weight	50.8kg/roll (2.0mm) 63.9kg/roll (2.5mm)			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco Royal Cement, Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
	TOLI UNDERLAY SHEET	US Cement, US Cement (less-smelly), US200		
Welding/Seam Finish	<ul style="list-style-type: none"> Welding rod for heat-welding is available on a color-by-color basis. JOINT SHIELD method (JS Method) by TOLI JOINT SHIELD is also applicable. 			
Notes on Installation	<ul style="list-style-type: none"> Seams should be heat-welded or finished with TOLI JOINT SHIELD. TOLI JOINT SHIELD can also work on the top of TOLI UNDERLAY SHEET, but when partial weight will be put on the floor (such as heavy stuff or casters), the seam joints should not be finished with TOLI JOINT SHIELD. When you install 2 different sheets, each edge should be jointed at the seam. (Do not cut in the middle of the sheet.) For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. Please do not use the urethane adhesive other than US Cement, US Cement (less-smelly), US200. As the sub-floor material, the underlayment like TOLI UNDERLAY SHEET (page 308) is also workable. Apply the same adhesive for both upside and downside of the underlayment. Please note that the durability to dynamic load will be degraded when you install with the underlayment. When you install FLOORLEUM MARBLE NW in the places where rollaway beds are used (e.g. a patient room of the hospital, a living room of the welfare facility and so forth), the epoxy adhesive such as TOLI Epo Gray ST or TOLI Epo Gray S and urethane adhesive such as US Cement, US Cement (less-smelly), US200 should be used even if the humidity of the sub-floor is less than 8%. 			
Recommended Way of Maintenance from TOLI	<ul style="list-style-type: none"> No need to apply the maintenance wax on the surface. Clean the floor every day with an auto scrubber or a wet rag wrung out tightly. Use the detergent for fixed contamination. Even if the wax is applied on the surface, it does not affect the quality of NW series. For a large facility, an abstergent auto scrubber is more recommendable. High speed buffing should be avoided. Otherwise highly durable UV coating will be abraded. 			
Others	<ul style="list-style-type: none"> At the entrance of the building, the dust control mat should be laid in order to avoid soils and sands from outside. To prepare the floor which is durable to rolling loads, please fully check the combination of FLOORLEUM MARBLE NW and the sub-floor, the adhesive, and the loads. For instance, when the sub-floor is too weak, FLOORLEUM MARBLE NW might be destroyed from underneath. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



◆ **Antibacterial Performance** <in accordance with JIS Z 2801>
In JIS testing criteria, when the value is more than 2.0, the product has sufficient antibacterial property.

	Escherichia Coli	Staphylococcus Aureus	MRSA
FLOORLEUM MARBLE NW	More than 2.0	More than 2.0	More than 2.0

Conducted by KAKEN TEST CENTER



20FL1501 (2.0mm)
25FL1501 (2.5mm)



20FL1502 (2.0mm)
25FL1502 (2.5mm) made-to-order



20FL1503 (2.0mm)
25FL1503 (2.5mm) made-to-order



20FL1508 (2.0mm)
25FL1508 (2.5mm) made-to-order



20FL1504 (2.0mm)
25FL1504 (2.5mm) made-to-order



20FL1505 (2.0mm)
25FL1505 (2.5mm)



20FL1506 (2.0mm)
25FL1506 (2.5mm)



20FL1507 (2.0mm)
25FL1507 (2.5mm)



FLOORLEUM MARBLE NW

category: low-maintenance vinyl sheet



Vinyl Sheet




20FL1509 (2.0mm)
25FL1509 (2.5mm) made-to-order



20FL1510 (2.0mm)
25FL1510 (2.5mm) made-to-order



20FL1511 (2.0mm)
25FL1511 (2.5mm) made-to-order



20FL1512 (2.0mm)
25FL1512 (2.5mm) made-to-order



20FL1513 (2.0mm)
25FL1513 (2.5mm) made-to-order



20FL1514 (2.0mm)
25FL1514 (2.5mm)



20FL1515 (2.0mm)
25FL1515 (2.5mm)



20FL1516 (2.0mm)
25FL1516 (2.5mm)



20FL1517 (2.0mm)
25FL1517 (2.5mm) made-to-order



20FL1518 (2.0mm)
25FL1518 (2.5mm) made-to-order



20FL1519 (2.0mm)
25FL1519 (2.5mm)



20FL1520 (2.0mm)
25FL1520 (2.5mm) made-to-order



20FL1521 (2.0mm)
25FL1521 (2.5mm)



20FL1522 (2.0mm)
25FL1522 (2.5mm) made-to-order



20FL1523 (2.0mm)
25FL1523 (2.5mm) made-to-order



20FL1524 (2.0mm)
25FL1524 (2.5mm)



20FL1525 (2.0mm)
25FL1525 (2.5mm)



20FL1526 (2.0mm)
25FL1526 (2.5mm) made-to-order



20FL1527 (2.0mm)
25FL1527 (2.5mm) made-to-order



20FL1528 (2.0mm)
25FL1528 (2.5mm) made-to-order



20FL1529 (2.0mm)
25FL1529 (2.5mm)



20FL1530 (2.0mm)
25FL1530 (2.5mm) made-to-order



20FL1531 (2.0mm)
25FL1531 (2.5mm)



20FL1532 (2.0mm)
25FL1532 (2.5mm) made-to-order



20FL1533 (2.0mm)
25FL1533 (2.5mm) made-to-order



FLOORLEUM SOILUD NW

category: low-maintenance vinyl sheet

“SOILUD NW” has a sharper design in the motif of kneaded soil.

Specification	overall thickness	2.0mm	width×length	1820mm×9m
	others	Antibacterial Finished / Highly Durable UV-Coated Surface		
JIS Registered No.	No. GB0506143 (JIS A 5705 Vinyl Sheet Flooring)			
Packing	9m/roll			
Net Weight	45.9kg/roll			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco Royal Cement, Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
	TOLI UNDERLAY SHEET	US Cement, US Cement (less-smelly), US200		
Welding/Seam Finish	<ul style="list-style-type: none"> Welding rod for heat-welding is available on a color-by-color basis. JOINT SHIELD method (JS Method) by TOLI JOINT SHIELD is also applicable. 			
Notes on Installation	<ul style="list-style-type: none"> Seams should be heat-welded or finished with TOLI JOINT SHIELD. TOLI JOINT SHIELD can also work on the top of TOLI UNDERLAY SHEET, but when partial weight will be put on the floor (such as heavy stuff or casters), the seam joints should not be finished with TOLI JOINT SHIELD. When you install 2 different sheets, each edge should be jointed at the seam. (Do not cut in the middle of the sheet.) For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. Please do not use the urethane adhesive other than US Cement, US Cement (less-smelly), US200. As the sub-floor material, the underlayment like TOLI UNDERLAY SHEET (page 308) is also workable. Apply the same adhesive for both upside and downside of the underlayment. Please note that the durability to dynamic load will be degraded when you install with the underlayment. When you install FLOORLEUM SOILUD NW in the places where rollaway beds are used (e.g. a patient room of the hospital, a living room of the welfare facility and so forth), the epoxy adhesive such as TOLI Epo Gray ST or TOLI Epo Gray S and urethane adhesive such as US Cement, US Cement (less-smelly), US200 should be used even if the humidity of the sub-floor is less than 8%. 			
Recommended Way of Maintenance from TOLI	<ul style="list-style-type: none"> No need to apply the maintenance wax on the surface. Clean the floor every day with an auto scrubber or a wet rag wrung out tightly. Use the detergent for fixed contamination. Even if the wax is applied on the surface, it does not affect the quality of NW series. For a large facility, an abstergent auto scrubber is more recommendable. High speed buffing should be avoided. Otherwise highly durable UV coating will be abraded. 			
Others	<ul style="list-style-type: none"> At the entrance of the building, the dust control mat should be laid in order to avoid soils and sands from outside. To prepare the floor which is durable to rolling loads, please fully check the combination of FLOORLEUM SOILUD NW and the sub-floor, the adhesive, and the loads. For instance, when the sub-floor is too weak, FLOORLEUM SOILUD NW might be destroyed from underneath. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



20FL629

◆ **Antibacterial Performance** <in accordance with JIS Z 2801>
In JIS testing criteria, when the value is more than 2.0, the product has sufficient antibacterial property.

	Escherichia Coli	Staphylococcus Aureus	MRSA
FLOORLEUM SOILUD NW	More than 2.0	More than 2.0	More than 2.0

Conducted by KAKEN TEST CENTER



20FL625




20FL626



20FL627




20FL628



20FL621



20FL622



20FL623




20FL624



FLOORLEUM SOILUD NW

category: low-maintenance vinyl sheet

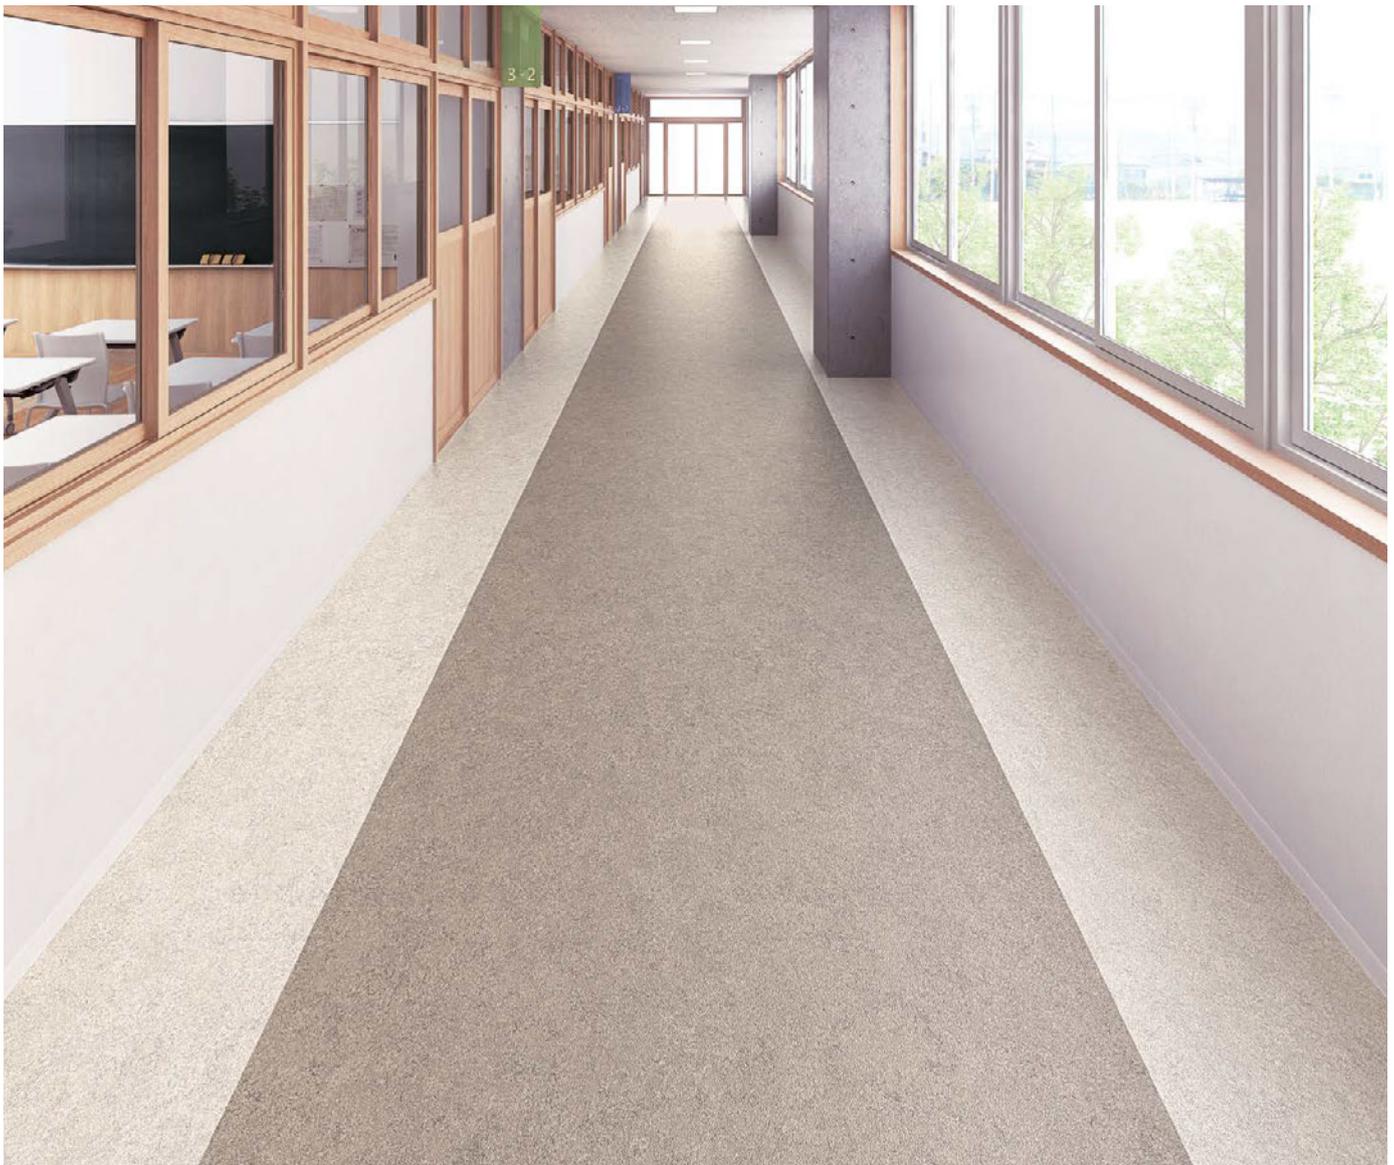

Vinyl Sheet

▲ 20FL625/20FL627



|| 20FL629



|| 20FL630



|| 20FL633



|| 20FL635



|| 20FL631



|| 20FL632



|| 20FL634



FLOORLEUM NATTY NW

category: low-maintenance vinyl sheet

Flown pattern of "NATTY NW" has the authentic image of fine wood-grains.

Specification	overall thickness	2.0mm	width×length	1820mm×9m
	others	Antibacterial Finished / Highly Durable UV-Coated Surface		
JIS Registered No.	No. GB0506143 (JIS A 5705 Vinyl Sheet Flooring)			
Packing	9m/roll			
Net Weight	45.9kg/roll			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco Royal Cement, Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
	TOLI UNDERLAY SHEET	US Cement, US Cement (less-smelly), US200		
Welding/Seam Finish	<ul style="list-style-type: none"> ↗Welding rod for heat-welding is available on a color-by-color basis. ↗JOINT SHIELD method (JS Method) by TOLI JOINT SHIELD is also applicable. 			
Notes on Installation	<ul style="list-style-type: none"> ↗Seams should be heat-welded or finished with TOLI JOINT SHIELD. ↗TOLI JOINT SHIELD can also work on the top of TOLI UNDERLAY SHEET, but when partial weight will be put on the floor (such as heavy stuff or casters), the seam joints should not be finished with TOLI JOINT SHIELD. ↗When you install 2 different sheets, each edge should be jointed at the seam. (Do not cut in the middle of the sheet.) ↗For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ↗Please do not use the urethane adhesive other than US Cement, US Cement (less-smelly), US200. ↗As the sub-floor material, the underlayment like TOLI UNDERLAY SHEET (page 308) is also workable. Apply the same adhesive for both upside and downside of the underlayment. Please note that the durability to dynamic load will be degraded when you install with the underlayment. ↗When you install FLOORLEUM NATTY NW in the places where rollaway beds are used (e.g. a patient room of the hospital, a living room of the welfare facility and so forth), the epoxy adhesive such as TOLI Epo Gray ST or TOLI Epo Gray S and urethane adhesive such as US Cement, US Cement (less-smelly), US200 should be used even if the humidity of the sub-floor is less than 8%. 			
Recommended Way of Maintenance from TOLI	<ul style="list-style-type: none"> ↗No need to apply the maintenance wax on the surface. Clean the floor every day with an auto scrubber or a wet rag wrung out tightly. Use the detergent for fixed contamination. ↗Even if the wax is applied on the surface, it does not affect the quality of NW series. ↗For a large facility, an abstergent auto scrubber is more recommendable. ↗High speed buffing should be avoided. Otherwise highly durable UV coating will be abraded. 			
Others	<ul style="list-style-type: none"> ↗At the entrance of the building, the dust control mat should be laid in order to avoid soils and sands from outside. ↗To prepare the floor which is durable to rolling loads, please fully check the combination of FLOORLEUM NATTY NW and the sub-floor, the adhesive, and the loads. For instance, when the sub-floor is too weak, FLOORLEUM NATTY NW might be destroyed from underneath. ↗Please be aware that some rubber casters might cause color-contamination. ↗Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN

Vinyl Sheet



▲ 20FL302



20FL307

◆ Antibacterial Performance <in accordance with JIS Z 2801>
In JIS testing criteria, when the value is more than 2.0, the product has sufficient antibacterial property.

	Escherichia Coli	Staphylococcus Aureus	MRSA
FLOORLEUM NATTY NW	More than 2.0	More than 2.0	More than 2.0

Conducted by KAKEN TEST CENTER



|| 20FL301



|| 20FL302



|| 20FL303



|| 20FL304



|| 20FL305



|| 20FL306



|| 20FL307



|| 20FL308



FLOORLEUM PLAIN NW

category: low-maintenance vinyl sheet

FLOORLEUM advanced to NW finish. Beautiful plain-colored vinyl sheet with a shiny surface.

Specification	overall thickness	2.0mm/2.5mm	width×length	1820mm×9m
	others	Antibacterial Finished / Highly Durable UV-Coated Surface		
JIS Registered No.	No. GB0506143 GB0610001 (JIS A 5705 Vinyl Sheet Flooring)			
Packing	9m/roll			
Net Weight	50.8kg/roll (2.0mm) 63.9kg/roll (2.5mm)			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco Royal Cement, Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
	TOLI UNDERLAY SHEET	US Cement, US Cement (less-smelly), US200		
Welding/Seam Finish	<ul style="list-style-type: none"> ◆Welding rod for heat-welding is available on a color-by-color basis. ◆JOINT SHIELD method (JS Method) by TOLI JOINT SHIELD is also applicable. 			
Notes on Installation	<ul style="list-style-type: none"> ◆Seams should be heat-welded or finished with TOLI JOINT SHIELD. ◆TOLI JOINT SHIELD can also work on the top of TOLI UNDERLAY SHEET, but when partial weight will be put on the floor (such as heavy stuff or casters), the seam joints should not be finished with TOLI JOINT SHIELD. ◆When you install 2 different sheets, each edge should be jointed at the seam. (Do not cut in the middle of the sheet.) ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆Please do not use the urethane adhesive other than US Cement, US Cement (less-smelly), US200. ◆As the sub-floor material, the underlayment like TOLI UNDERLAY SHEET (page 308) is also workable. Apply the same adhesive for both upside and downside of the underlayment. Please note that the durability to dynamic load will be degraded when you install with the underlayment. ◆When you install FLOORLEUM PLAIN NW in the places where rollaway beds are used (e.g. a patient room of the hospital, a living room of the welfare facility and so forth), the epoxy adhesive such as TOLI Epo Gray ST or TOLI Epo Gray S and urethane adhesive such as US Cement, US Cement (less-smelly), US200 should be used even if the humidity of the sub-floor is less than 8%. 			
Recommended Way of Maintenance from TOLI	<ul style="list-style-type: none"> ◆No need to apply the maintenance wax on the surface. Clean the floor every day with an auto scrubber or a wet rag wrung out tightly. Use the detergent for fixed contamination. ◆Even if the wax is applied on the surface, it does not affect the quality of NW series. ◆For a large facility, an abstergent auto scrubber is more recommendable. ◆High speed buffing should be avoided. Otherwise highly durable UV coating will be abraded. 			
Others	<ul style="list-style-type: none"> ◆At the entrance of the building, the dust control mat should be laid in order to avoid soils and sands from outside. ◆To prepare the floor which is durable to rolling loads, please fully check the combination of FLOORLEUM PLAIN NW and the sub-floor, the adhesive, and the loads. For instance, when the sub-floor is too weak, FLOORLEUM PLAIN NW might be destroyed from underneath. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			


MADE IN JAPAN




◆ **Antibacterial Performance** <in accordance with JIS Z 2801>
In JIS testing criteria, when the value is more than 2.0, the product has sufficient antibacterial property.

	Escherichia Coli	Staphylococcus Aureus	MRSA
FLOORLEUM PLAIN NW	More than 2.0	More than 2.0	More than 2.0


Conducted by KAKEN TEST CENTER



20FL1001 (2.0mm)
25FL1001 (2.5mm) made-to-order




20FL1002 (2.0mm)
25FL1002 (2.5mm)



20FL1003 (2.0mm)
25FL1003 (2.5mm)




20FL1004 (2.0mm)
25FL1004 (2.5mm)



20FL1008 (2.0mm)
25FL1008 (2.5mm)



20FL1009 (2.0mm)
25FL1009 (2.5mm)



20FL1010 (2.0mm)
25FL1010 (2.5mm)



20FL1011 (2.0mm)
25FL1011 (2.5mm) made-to-order



FLOORLEUM PLAIN NW

category: low-maintenance vinyl sheet



Vinyl Sheet


▲ 20FL1006/20FL1016



20FL1014 (2.0mm)
25FL1014 (2.5mm) made-to-order




20FL1015 (2.0mm)
25FL1015 (2.5mm) made-to-order



20FL1016 (2.0mm)
25FL1016 (2.5mm) made-to-order




20FL1017 (2.0mm)
25FL1017 (2.5mm) made-to-order



20FL1005 (2.0mm)
25FL1005 (2.5mm) made-to-order



20FL1006 (2.0mm)
25FL1006 (2.5mm) made-to-order



20FL1007 (2.0mm)
25FL1007 (2.5mm) made-to-order



20FL1012 (2.0mm)
25FL1012 (2.5mm) made-to-order



20FL1013 (2.0mm)
25FL1013 (2.5mm) made-to-order