



ROYAL WOOD (100mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	100mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	30pcs/box = 2.70m ² /box			
Net Weight	14.0kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ♦ has a Natural Tone pattern.

MIX-AND-MATCH COLOR



PWT2395 ♦

For mix-and-match effect, plank tiles with different color and shading are randomly packed in a box. Sometimes the same type of colors might be disproportionately packed in one same box.



PWT2308

♦ OAK



PWT2314

♦ OAK



PWT2316

♦ OAK



PWT2318

♦ OAK



PWT2386

♦ OAK



PWT2387

♦ OAK



ROYAL WOOD (100mm×900mm plank)

category: solid vinyl tile



Vinyl Tile



PWT2396 ASH



PWT2397 ASH



PWT2398 OAK



PWT2399 OAK




PWT2418 OAK



PWT2433 CHERRY



PWT2434 CHERRY



PWT2435 CHERRY



PWT2439 MAPLE



PWT2440 MAPLE

T-WAX (Non-shiny and Antibacterial) is recommendable for authentic less-glossy patterns from ROYAL STONE and ROYAL WOOD ranges. Even after applying the wax, the floor can maintain the image of a real stone or wood.

T WAX(Non-shiny&Antibacterial)



U WAX



Round-Beveling will make the floor much more natural.

•R-chamfer processing




Thanks to the new chamfer processing, floor covering, including the chamfer part, look as natural and vivid as the wood.

※TOLI has obtained a drawing-technology patent for its 4-side R chamfer processing.

■TYPE OF BEVELING

ROUND-BEVELING

Finish the beveling with a rounded shape. Authentic wood texture can be created on the beveled part as well.




FINE BEVELING

Finish the beveling only on the surface clear wear layer. Beveled lines do not stand out and a high-end image can be conveyed.




REGULAR BEVELING

Finish the beveling through to the backing layer. Beveled lines are clearly visible.



NO BEVELING

As the edge of a tile is not beveled, the joints will look flat and simple after the installation.



▲ PWT2386



▲ PWT2396



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	150mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	20pcs/box = 2.70m ² /box			
Net Weight	14.0kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



PWT2307



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ♦ has a Natural Tone pattern.



PWT2301 ♦ OAK



PWT2303 ♦ OAK



PWT2305 ♦ OAK




PWT2306 ♦ OAK



PWT2307 ♦ OAK



PWT2309 ♦ OAK



PWT2311 ♦ OAK



PWT2312 ♦ OAK



PWT2313 ♦ OAK



PWT2315 ♦ OAK



PWT2317 ♦ OAK




PWT2320 ♦ OAK



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile



PWT2321 OAK



PWT2322 WALNUT



PWT2323 WALNUT



PWT2324 WALNUT



PWT2325 WALNUT



PWT2327 WALNUT



PWT2328 WALNUT



PWT2329 WALNUT



PWT2343 ACACIA



PWT2344 ACACIA



PWT2345 OAK



PWT2346 OAK



PWT2351



PWT2352



PWT2353



PWT2356 OAK



PWT2306



PWT2345

Vinyl Tile



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	150mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	20pcs/box = 2.70m ² /box			
Net Weight	14.0kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ♦ has a Natural Tone pattern.



|| PWT2357 OAK



|| PWT2367 ♦ OAK



|| PWT2368 ♦ OAK



|| PWT2371 ♦ OAK



|| PWT2372 ♦ OAK



|| PWT2373 VINTAGE FIR



|| PWT2374 VINTAGE FIR



|| PWT2375 ♦ PINE



|| PWT2378 PINE



|| PWT2380 OAK



|| PWT2381 OAK




|| PWT2382 TEAK



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile



PWT2383 TEAK



PWT2394 PINE



PWT2400 OAK



PWT2401 OAK



PWT2402 WALNUT



PWT2403 WALNUT



PWT2404 WALNUT



PWT2405 ZEBRAWOOD



PWT2406 ZEBRAWOOD



PWT2407 MAHOGANY



PWT2408 MAHOGANY



PWT2409 OAK



PWT2410 OAK



PWT2411 OAK



PWT2412 OAK



PWT2413 OAK



▲ PWT2401

ROYAL WOOD & REAL DECO & HARDEC

13 colors from ROYAL WOOD (100mm×900mm and 150mm×900mm plank) can be exactly coordinated with TOLI wall covering REAL DECO and HARDEC.

ROYAL WOOD	REAL DECO	HARDEC
PWT2396 (page 249)	WRW6009	—
PWT2397 (page 249)	WRW6010	—
PWT2398 (page 249)	WRW6007	—
PWT2399 (page 249)	WRW6008	—
PWT2400	WRW6081	DEC6081
PWT2401	WRW6087	DEC6087
PWT2402	WRW6141	—
PWT2403	WRW6142	—
PWT2404	WRW6161	—
PWT2405	WRW6044	DEC6044
PWT2406	WRW6050	DEC6050
PWT2407	WRW6133	DEC6133
PWT2408	WRW6137	DEC6137



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	150mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	20pcs/box = 2.70m ² /box			
Net Weight	14.0kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ◆ has a Natural Tone pattern.



|| PWT2414 ◆ OAK



|| PWT2415 ◆ OAK



|| PWT2416 ◆ OAK



|| PWT2417 ◆ OAK



|| PWT2421 OAK



|| PWT2422 OAK



|| PWT2423 OAK



|| PWT2424 TEAK



▲ PWT2411



ROYAL WOOD (150mm×900mm plank)

category: solid vinyl tile



PWT2425 TEAK



PWT2426 PINE



PWT2427 PINE



PWT2428 ◆ NOCE



PWT2429 ◆ NOCE



PWT2436 ◆ MAPLE



PWT2437 ◆ MAPLE



PWT2438 ◆ MAPLE



PWT2442 ◆ CHERRY



PWT2443 ◆ CHERRY




PWT2444 CEDAR



PWT2445 CEDAR



▲ PWT2443

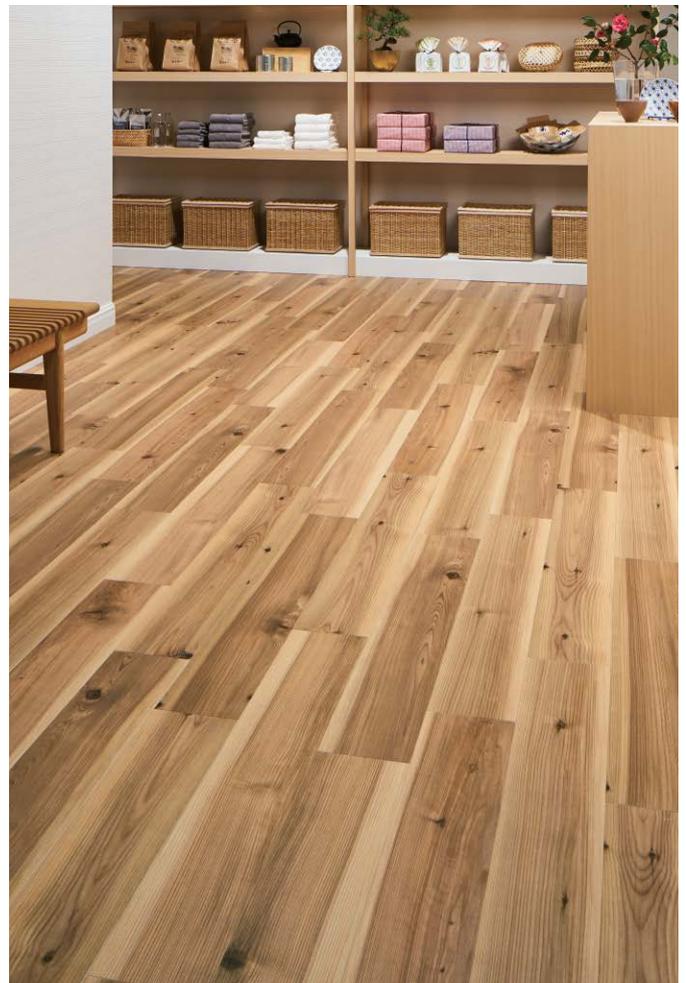

▲ PWT2444

Vinyl
Tile



ROYAL WOOD (180mm×1260mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	180mm×1260mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	12pcs/box = 2.72m ² /box			
Net Weight	15.1kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆In PWT2384 and PWT2385 some block patterns in a tile may not seem strictly straight, which is not quality defectiveness. After the installation, the whole floor image will look natural. ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



PWT2364



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.



PWT2339 ◆ OAK



PWT2340 ◆ OAK



PWT2364 OAK



PWT2365 OAK



PWT2366 OAK



PWT2369 OAK



PWT2370 OAK



PWT2376 ◆ OAK



PWT2377 ◆ OAK



PWT2379 ◆ OAK



PWT2384



PWT2385



ROYAL WOOD (180mm×1260mm plank)

category: solid vinyl tile



▲ PWT2340



▲ PWT2385

Vinyl
Tile



|| PWT2388 PINE



|| PWT2389 PINE



|| PWT2390 PINE



|| PWT2391 PINE



|| PWT2392 OVANGKOL



|| PWT2393 OAK



|| PWT2419 ◆ OAK



|| PWT2420 ◆ OAK



|| PWT2430 ◆ CHERRY



|| PWT2431 ◆ CHERRY



|| PWT2432 ◆ CHERRY



|| PWT2441 ◆ CYPRESS



ROYAL WOOD (75mm×900mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	75mm×900mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	40pcs/box = 2.70m ² /box			
Net Weight	14.0kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



PWT2341



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ◆ has a Natural Tone pattern.



PWT2341 ◆ OAK



PWT2342 ◆ OAK



▲ PWT2342



ROYAL WOOD HIGH-END (152.4mm×914.4mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs.

Specification	overall thickness	3.0mm	size	152.4mm×914.4mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	20pcs/box = 2.78m ² /box			
Net Weight	15.8kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			


Vinyl Tile



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ◆ has a **Natural Tone** pattern.



▲ PWT2348

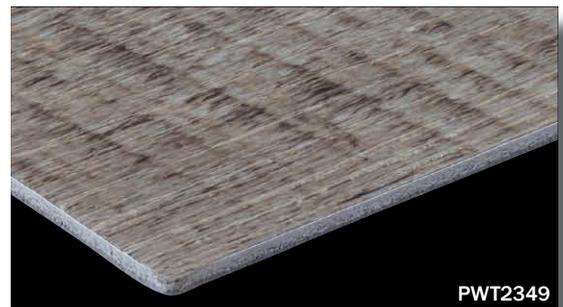

PWT2349



|| PWT2347 ◆ OAK




|| PWT2348 ◆ OAK



|| PWT2349 ◆ OAK



|| PWT2350 ◆ OAK



Only one long side of a plank tile is bordered to highlight the joints. Please install the tiles so that the bordered side will face the same direction.

ROYAL WOOD MIXED-PLANK

(76.2mm/101.6mm/152.4mm×914.4mm plank)

category: solid vinyl tile

3 different size of plank tiles in different color tones are mixed in one same box. Amazing new concept will create a classy image of authentic wood flooring.



Specification	overall thickness	3.0mm	size	76.2mm×914.4mm 101.6mm×914.4mm 152.4mm×914.4mm
	others	Surface Clear Wear Layer 0.3mm		
Packing	36pcs/box = 3.62m ² /box			
Net Weight	20.3kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			


Vinyl Tile



PWT2334




Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced. The color number marked with ◆ has a **Natural Tone** pattern.

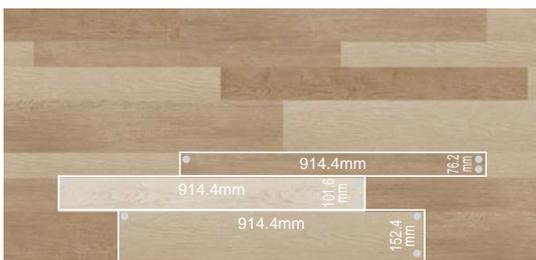

PWT2333


◆ OAK

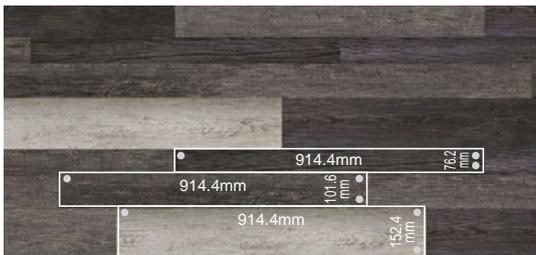

PWT2334

◆ OAK

For mix-and-match effect, plank tiles with different color, shading, and size are randomly packed in a box. Sometimes the same type of colors might be disproportionately packed in one same box. (3 different sizes: 76.2mm×914.4mm/101.6mm×914.4mm/152.4mm×914.4mm)

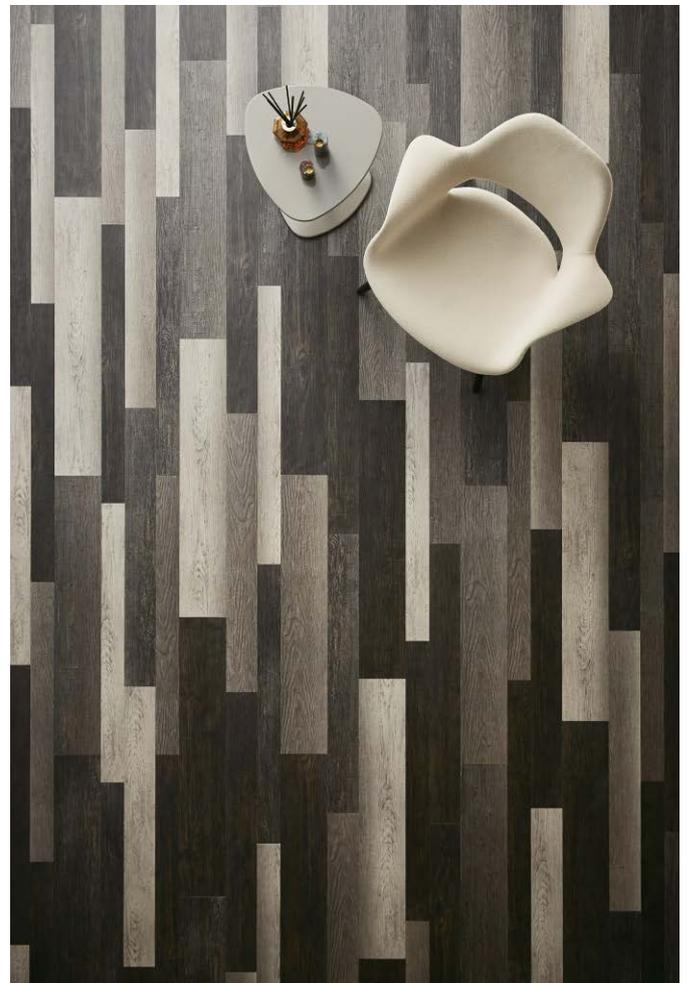

▲ PWT2334



ROYAL WOOD HIGH-END (75mm×450mm mini-plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs.

Specification	overall thickness	3.0mm	size	75mm×450mm
	others	Surface Clear Wear Layer 0.3mm / Round-Beveled		
Packing	84pcs/box = 2.83m ² /box			
Net Weight	14.7kg/box			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please note that the product has the indigenous odor from its materials. 			

Vinyl Tile



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.



▲ PWT2304



■ PWT2302 ◆ OAK



■ PWT2310 ◆ OAK



■ PWT2304 ◆ OAK



■ PWT2319 ◆ OAK



■ PWT2326 ◆ OAK



ROYAL WOOD HIGH-END (228.6mm×1422.4mm plank)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs.

Specification	overall thickness	3.0mm	size	228.6mm×1422.4mm
	others	Surface Clear Wear Layer 0.3mm / Fine-Beveled		
Packing	8pcs/box = 2.60m ² /box			
Net Weight	15.5kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

Vinyl Tile



PWT2331



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a **Natural Tone** pattern.



PWT2330

◆ OAK



PWT2331

◆ OAK



PWT2332

◆ OAK



▲ PWT2330



ROYAL WOOD GRAND (300mm square)

category: solid vinyl tile

ROYAL WOOD GRAND can create very amusing floor images in your projects. Beautiful leaf patterns and parquet designs will offer a sophisticated atmosphere.

Specification	overall thickness	3.0mm	size	300mm×300mm
	others	Surface Clear Wear Layer 0.3mm		
Packing	36pcs/box = 3.24m ² /box			
Net Weight	17.5kg/box			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ↗ Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ↗ For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ↗ The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Others	<ul style="list-style-type: none"> ↗ The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ↗ Please be aware that some rubber casters might cause color-contamination. ↗ Please note that the product has the indigenous odor from its materials. 			

Vinyl Tile



PWT2359



PWT2358
PARQUET
(OAK)



PWT2359
PARQUET

▲ PWT2358



ROYAL WOOD (450mm square)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs. Green product with "ECO Mark"-certified.

Specification	overall thickness	3.0mm	size	450mm×450mm
	others	Surface Clear Wear Layer 0.3mm		
Packing	14pcs/box = 2.83m ² /box			
Net Weight	14.7kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Way of Installation	(PWT2354 · PWT2355 · PWT2446)			Quater Turn
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

MADE IN JAPAN



PWT2446



PWT2354
PARQUET ◆




PWT2362
OSB




PWT2446
CANE



PWT2355
PARQUET ◆



PWT2363
OSB

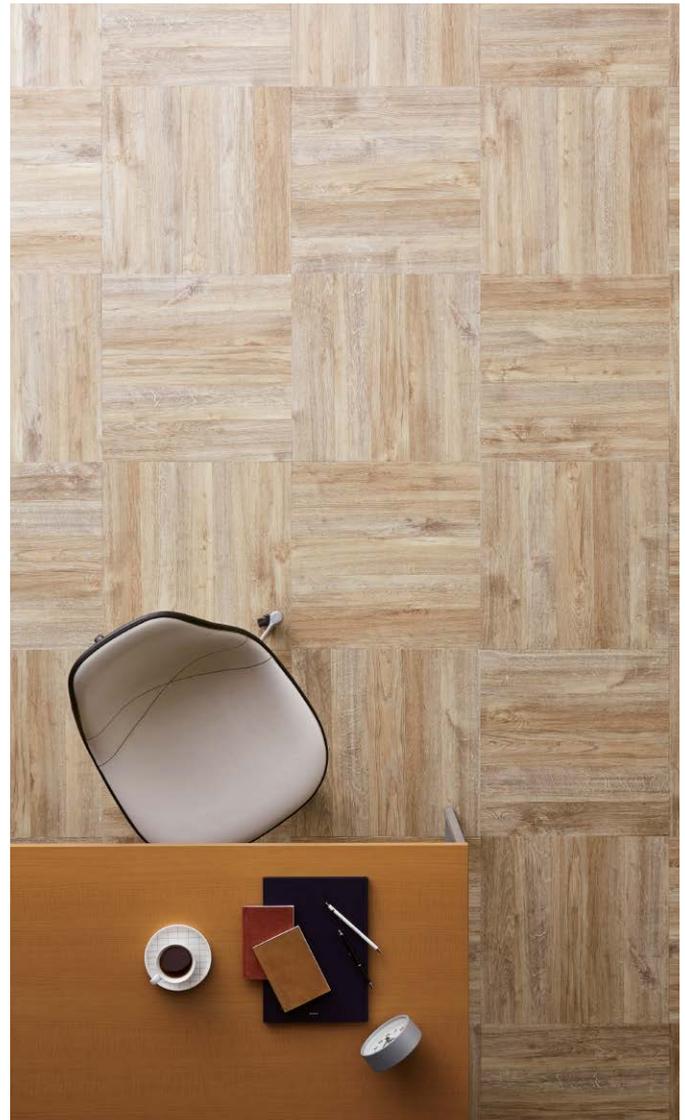

▲ PWT2354



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.
The color number marked with ◆ has a Natural Tone pattern.



ROYAL WOOD HIGH-END (450mm square)

category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs.

Specification	overall thickness	3.0mm	size	450mm×450mm
	others	Surface Clear Wear Layer 0.3mm		
Packing	14pcs/box = 2.83m ² /box			
Net Weight	14.7kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Way of Installation	 Quater Turn			
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

Vinyl Tile



Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.

The color number marked with ◆ has a Natural Tone pattern.



PWT2361
PARQUET ◆

▲ PWT2361



ROYAL WOOD GRAND (600mm square)

category: solid vinyl tile

Authentic registered-embossed pattern in large 600mm × 600mm size.

Specification	overall thickness	3.0mm	size	600mm×600mm
	others	Surface Clear Wear Layer 0.5mm / Fine Beveling		
Packing	10pcs/box = 3.60m ² /box			
Net Weight	21.5kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			

Vinyl Tile



PWT2336



PWT2335
PARQUET



PWT2336
PARQUET

※4 different patterns are packed in one same box. Random installation of 4 patterns will create the image of authentic wood flooring.



▲ PWT2335



ROYAL WOOD HIGH-END (130mm hexagon)

category: solid vinyl tile

ROYAL STONE in hexagon size is a next-generation vinyl tile which will spark a revolution with its one-of-a-kind shape.


Specification	overall thickness	3.0mm	size	130mm hexagon
	others	Surface Clear Wear Layer 0.3mm / Beveled		
Packing	64pcs/box = 2.80m ² /box			
Net Weight	14.6kg/box			
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Others	<ul style="list-style-type: none"> The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. Please be aware that some rubber casters might cause color-contamination. Please bear in mind that ROYAL WOOD (hexagon) may take more time for layout and installation compared to the tiles in square size. Please note that the product has the indigenous odor from its materials. When you install the tiles in hexagon size, you will have a better appearance by finishing the joints with caulking materials. Occasionally a very slight size difference could be seen between different production lots. For designed installation of 4-sides-beveled tiles, or installation of tiles with the shape of hexagon, trapezium and 900mm square, please adjust the size of a tile as needed. Otherwise joints should be finished with caulking compound. Squareness of tiles are fully checked during the production. However, due to the condition of sub-floor and others, joints might not be strictly matched in some cases. 			

Vinyl Tile




Based on intensive research on authentic texture of natural stones and wood-grains, realistic natural tones have been reproduced.

The color number marked with ◆ has a Natural Tone pattern.

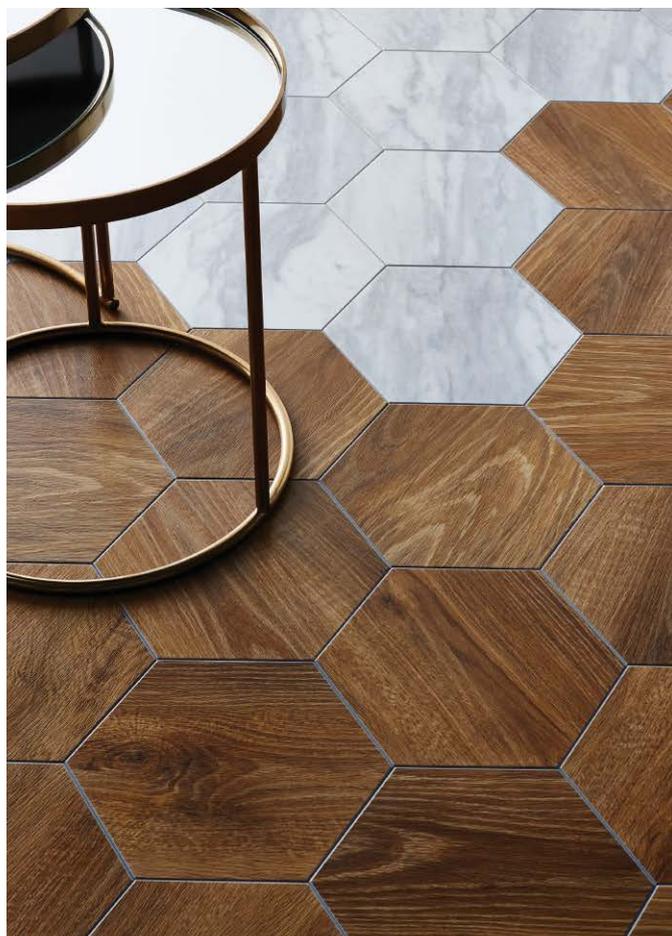

|| PWT2360 ◆

<Dimension Details>



PWT2360

▲ PWT2360/PST2038 (ROYAL STONE · page 241)



ROYAL WOOD HERRINGBONE (457.2mm×914.4mm plank)


category: solid vinyl tile

ROYAL WOOD is TOLI's new wood-look solid vinyl tile range that has variety of sizes and authentic designs.


Specification	overall thickness	3.0mm	size	457.2mm×914.4mm
	others	Surface Clear Wear Layer 0.3mm		
Packing	8pcs/box = 3.34m ² /box			
Net Weight	19.8kg/box			
Performance	Wear Resistance	(EN649) Group T		
Recommended Adhesive from TOLI	dried mortar and concrete	Eco AR600		
	humid mortar and concrete	Epo Gray ST, US Cement, US Cement (less-smelly), US200		
Notes on Installation	<ul style="list-style-type: none"> ◆Before installation, make sure the arrow marks on the back of each tile, which show the direction of the pattern. ◆For one week after installation, direct sunlight, sudden change of temperature due to air conditioning, and water washing should be avoided. ◆The color shading differs on a tile-by-tile basis, which will make the floor look very natural when the tiles are installed. 			
Recommended Maintenance Wax from TOLI	New FB Wax, U Wax, T Wax (Non-shiny & Antibacterial)			
Custom Order	If you ask for a different size or wear layer, please contact TOLI sales rep.			
Others	<ul style="list-style-type: none"> ◆The dirt and stains will be more visible on the floor covering with lighter plain colors, compared to dark colors. Also they are more likely to stick with the deep-embossed surface than the flat surface. ◆Please be aware that some rubber casters might cause color-contamination. ◆Please note that the product has the indigenous odor from its materials. 			



PWT2337

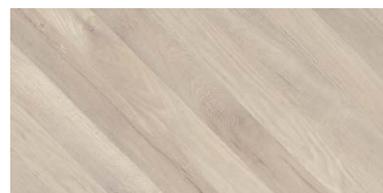

PWT2337

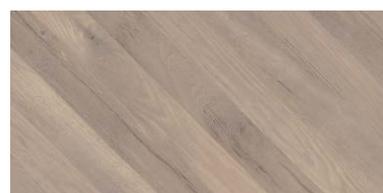

PWT2338



TYPE A (diagonally right up)



TYPE B (diagonally right down)

4 tiles each for 2 different designs (A and B) are packed in one same box. On the joints of A and B, plank patterns are not strictly connected.

▲ PWT2337/PST2008 (ROYAL STONE - page 234)

Vinyl Tile